

WIRING HARNESSES OVERMOULDED SOLUTIONS





EUROCAB S.r.l.

Via dei Tigli, 12
 60027 Osimo (An) - Italy
 Phone. +39 071 7232487 / 071 7133412
 fax +39 071 7131453
 VAT. IT 02050520424
 info@eurocab.it
 www.eurocab.it



Since 1979, year of foundation of our company, we've been delivering wiring harnesses and overmoulded solutions for different industries, such as home appliances, electric motors and earth-moving machines.

Our mission over the last 40 years focused on the same goal: technology investment, ensuring high quality standards all over the production operations, embracing the philosophy according which the right process will produce the right result.

Today this approach led us to be reliable partners for our Customers. We developed an efficient Quality Management System to meet customer requirements and grow their satisfaction. FMEA, PPAP and workflow process documentation is provided upon request to our Customers.

We process single core, multicore and power cables with fully automatic and semi-automatic machinery, adopting both standard crimp connections and the special IDC technologies (Insulation Displacement Contact).




The suitable positioning of wires into IDC connectors is checked with laser tools



Fully automatic IDC processings



Cross section analysis using an electron micrograph.

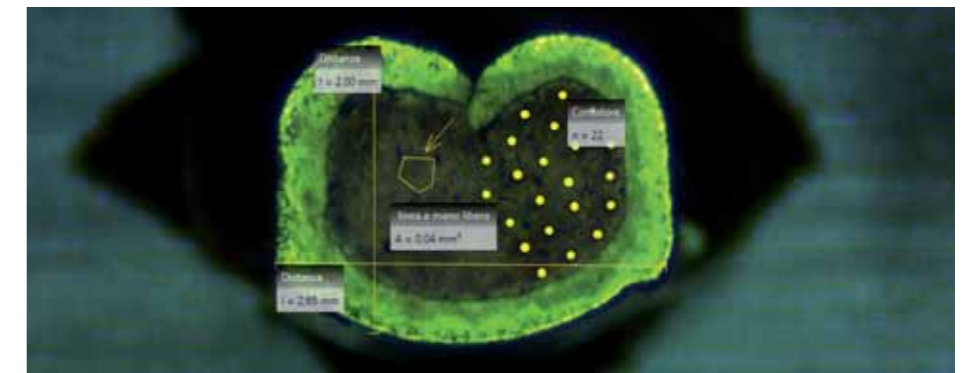

Overmoulded connector for three way valve motors

- Rated current: 5A
- Voltage: 230 V
- Operating temperature: 70/120°C
- Cable section: 3x0,35/0,50 mm²
- Overmoulding material: PVC | Glow Wire Test APPROVED



Overmoulded 6 poles connector for modulating pumps

- Rated current: 5A
- Voltage: 230 V
- Operating temperature: 70/120°C
- Cable section: 5x0,35/0,50 mm²
- Overmoulding material: PVC



Overmoulded connector for diverter valves 180°

- Rated current: 12A
- Voltage: 230 V
- Operating temperature: 70/120°C
- Cable section: 3x0,50 mm²
- Overmoulding material: PVC | Glow Wire Test APPROVED



Overmoulded connector for modulating pumps (left hand)

- Rated current: 9A
- Voltage: 230 V
- Operating temperature: 70/120°C
- Cable section: 3x0,35/0,50/0,75 mm²
- Overmoulding material: PVC



Overmoulded connector for modulating pumps (right hand)

- Rated current: 9A
- Voltage: 230 V
- Operating temperature: 70/120°C
- Cable section: 3x0,35/0,50/0,75 mm²
- Overmoulding material: PVC



Overmoulded connector for temperature sensors

- Voltage: 230 V
- Operating temperature: 70/120°C
- Cable section: 0,35/0,50 mm²
- Overmoulding material: PVC



Overmoulded connector for gas valves 180°

- Rated current: 9A
- Voltage: 230 V
- Operating temperature: 70/120°C
- Cable section: 3x0,50 mm²
- Overmoulding material: PVC



Overmoulded connector for diverter valves 90° (right hand)

- Voltage: 230 V
- Operating temperature: 70/120°C
- Cable section: 3x0,35/0,50 mm²
- Overmoulding material: PVC



Overmoulded connector for gas valves 90°

- Rated current: 9A
- Voltage: 230 V
- Operating temperature: 70/120°C
- Cable section: 3x0,50 mm²
- Overmoulding material: PVC



Overmoulded connector for contact thermostats

- Voltage: 230 V
- Operating temperature: 70/120 °C
- Cable section: 0,35/0,50 mm
- Overmoulding material: PVC



Overmoulded connector for diverter valves 90° (left hand)

- Voltage: 230 V
- Operating temperature: 70/120°C
- Cable section: 3x0,35/0,50 mm²
- Overmoulding material: PVC



Overmoulded connector for contact thermostats

- Voltage: 230 V
- Operating temperature: 70/120°C
- Cable section: 2x0,35/0,50 mm
- Overmoulding material: PVC



Overmoulded connector for automatic filling valves

- Rated current: 12A
- Voltage: 230 V
- Operating temperature: 70/120°C
- Cable section: 2x0,50 mm²
- Overmoulding material: PVC



Overmoulded connector for solar temperature probes

- Voltage: 230 V
- Cable section: 2x0,35 mm²
- Overmoulding material: PVC



Overmoulded connector for AMP Superseal

- Rated current: 5A
- Voltage: 230 V
- Operating temperature: 70/120°C
- Cable section: 3x0,35/0,50 mm / 2x0,35/0,50 mm²
- Overmoulding material: PVC



How to reach us:

By car

From A14 Bologna-Taranto highway

Coming from North?
The nearest tollbooth from our plant is Ancona Sud - Osimo. You will easily find our plant following signs for Osimo.

Coming from South?
The nearest tollbooth from our plant is Loreto - Porto Recanati. You will easily find our plant following signs for Osimo.

By plane

The nearest airport is "Raffaello Sanzio" of Falconara Marittima - Ancona with a distance of 25 km, approximately, from our plant. Once there, you can follow signs to Agugliano / Osimo.

